OPTION We have a variety of options and much more.







Table



USB Wi-Fi dongle



Border Frame



Cap Frames



One Point Frame




Sock Frame

SPEC

Head	Needles	Embroidery Area (Length×Width)			Max Speed		
		Maximum	Wide Cap Frame	Low Pro Cap Frame	(rpm)	Stitch Length	Memory
1	12	285×290mm 11.2×11.4inch	67×290mm 2.6×11.4inch	67×180mm 2.6×7.1inch	1000 850 (Cap Frame)	0.1-12.7mm	100,000,000 stitches 3,000 designs

Power	Power Consumption	Frequency	Weight	Dimensions					
Supply				L	W	Н	А	В	С
Single phase 100-115V 200-230V	220W	50/60Hz	42kg	642mm	745mm	734mm	250mm	480mm	580mm
			92.6lbs	25inch	29inch	29inch	10inch	19inch	23inch

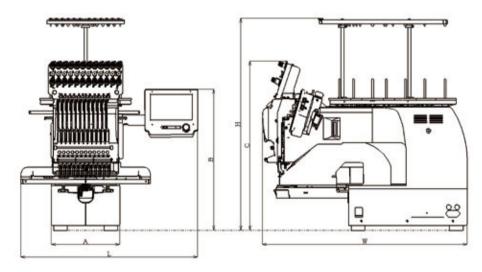

HappyJapan

HappyJapan Inc.

TOKYO OFFICE 2-9-5, Taito, Taito-ku, Tokyo 110-0016 JAPAN TEL: +81-(0)3-3834-0718 FAX: +81-(0)3-3835-8917 E-mail: emb-info@happyjpn.com URL: https://www.happyjpn.com

The colors of the products in this catalog may differ slightly from the actual colors due to printing. Please note some of specifications are subject to change without notice.

You can find:

GOVIC COMPANY d.o.o. Franje Račkog 10 HR-51000 Rijeka | Croatia

www.govic-company.hr mail.info@govic-company.hr



Professional single head 12 needles embroidery machine

4CS3

1201-30

AVAILABLE FOR INDUSTRIAL USE



Large workspace retained from former model allows for embroidery on large material such as bag and etc.




Professional Single Head 12 needles Embroidery Machine.

Due to design concept based on industrial use, high durability, high power, and high efficiency.

Strong embroidery even thick material such as caps and thick clothes!

Pressure foot for Fach Needle

Pressure Foot: 12 pcs (one pressure foot for every needle) Even if a pressure foot is broken, it is possible to use other needle.




Thread Cones with dia. 80mm available

HCS3 can use an upper thread cone with a diameter of 80mm, which can not be used with former model.



Direct Laser Pointer

Laser Pointer installed at zero needle position, vertical pinpoint laser is available. Cross Laser Pointer as options.




*The above is Cross Laser Pointer as option.

Bed downsizing

Cross-sectional area of cylinder arm minimized in size, it can embroider for thinner tube to the edge.



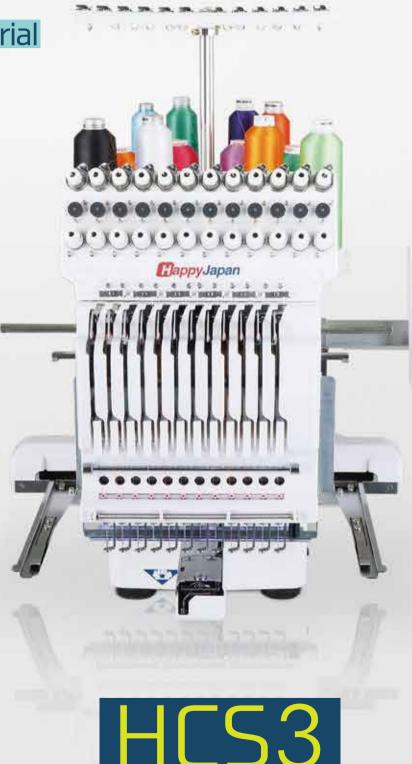



Safety Take-up Lever Cover

Adding Safety Take-up Lever Cover to improve workability.



Improved operability LCD Panel

Added USB PORT to the front. *USB Wi-Fi dongles can be used.

(*Option)



HAPPYLAN / LINK

Standard software HAPPYLAN/LINK enables network to control multiple machines with PC. Monogramming and design editing functions expand flexibilities and the possibilities.

Silent design

Silent and low vibration even at high speed operation. Pulse motor control makes even jump operation very quiet.

Shortening time of cutting thread on the back of fabric

Remaining thread length on the back of fabric shortened, work efficiency improves, 50% shorter than former model.

Cap Embroidery 10mm from Brim

Optional parts allow embroidery position 10mm from cap brim.
"X direction 110mm" *Standard model 15mm from cap brim.











